



# MIA SERIES

Creative flat screen for Rental

REFRESH RATE

**3840Hz**

NITS

**800-5,500**

**Indoor & Outdoor**




## Product Description


**Anti collision  
design of cabinet**




**Fast Connection**



**Fast Installation**



**Soft handle  
more comfortable to hold**





## ◆◆ Product main features

1. Extremely close view distances and wide view angles.
2. Silent operation, little heat generated (no fans).
3. Panel design makes storage, transportation, assemble and maintenance easy and simple.
4. Lightweight and seamless cabinet.



Product Parameters

# MIA SERIES



	Indoor			Outdoor	
Model	RC1.9-COB	RC1.9-GOB	RC2.6	RC2.9	RC3.9
Pixel Pitch/ mm	1.95	1.95	2.6	2.97	3.91
Brightness/ nit	1500	800	800	4000-5500	5000
Contrast	3000:1/20000:1				
Refresh rate/ Hz	3840/7680 HZ				
Grey scale/ bit	14-16/18-22				
View angle(horizontal/ vertical)	160°/120°				
IP Grade(front/ back)	IP30/IP30	IP30/IP30	IP30/IP30	IP65/IP54	IP65/IP54
Power Consumption(Max/ Aver.)W/ m <sup>2</sup>	450/150	450/150	450/150	730/245	730/245
Cabinet size/ mm	500x500x82				
Cabinet Weight/ kg	7.5				
Cabinet Material	Die-casting aluminum				
Module Dimension/ mm	250X250X14.6				
Cabinet Resolution/ Pixels	256x256	256x256	192x192	168x168	128x128
Pixel Density/ Pixels/ m <sup>2</sup>	262144	262144	147456	112896	65536
Input A/ C(Voltage)(V)	100-240				
Operating Temperaturer(°C)	-20~50				
Operating Humidity (Rh)	10%~95%				
Signal Type(with video processor)	DVI/HDMI				
Control Distance	Cat5e Lan cable:<100m;single-mode fiber cable:<10 kilometer				



Measurement



Front View

82mm



Side View


500mm



500mm

Back View

Information

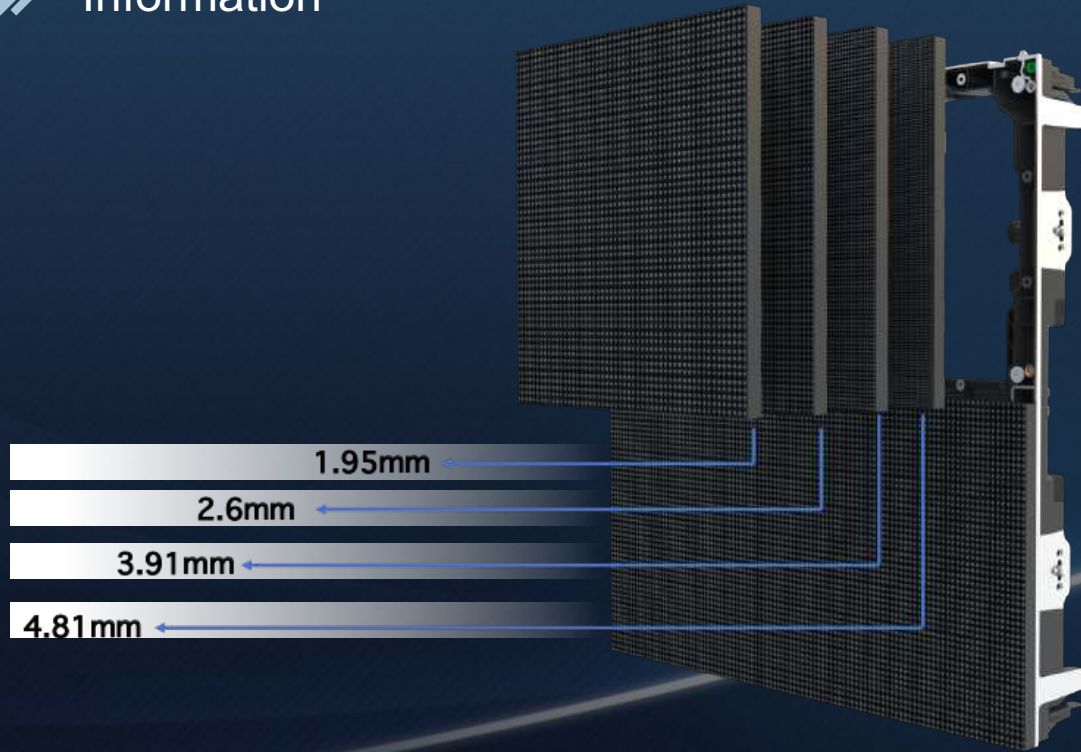

**Modular design:** Module, Power box and cabinet frame are three independent structures. Special module frame design ensures the flatness tolerance limit in 0.1mm.



Rotary curve interlock for angles  $-10^\circ$ ,  $-5^\circ$ ,  $0^\circ$ ,  $+5^\circ$ ,  $+10^\circ$   
(convex, flat, concave)